

SECTION 314 R-2 (ONE AND TWO FAMILY RESIDENTIAL)

PURPOSE – The R-2 (One and Two Family Residential) districts provide areas for medium density one- and two-family residential dwelling units in and near to the developed core areas of the township. The districts include areas of existing one- and two-family developments as well as areas within which such development appears likely and desirable. The R-2 districts are designed to encourage a suitable neighborhood environment for family life by including among the permitted uses such facilities as schools, places of worship and parks. They provide a range of housing choices and promote a sense of community, urban vitality, and the efficient provision of infrastructure.

A. USES PERMITTED BY RIGHT:

- (1) Adult Foster Care, Family Home
- (2) Cemetery
- (3) Dwelling, Single Family
- (4) Dwelling, Two-Family
- (5) Essential Service Facility, Minor – § 737.A
- (6) Home Occupation
- (7) Park, Mini
- (8) Park, Neighborhood
- (9) Solar Energy System, Accessory – § 773.A

B. USES PERMITTED BY SPECIAL CONDITIONS:

- (1) Child Care, Family Home (<7) – § 718
- (2) Child Care, Small Group Home (7-12) – § 719
- (3) Golf Course or Country Club – § 749
- (4) Keeping of Chickens, Personal – § 754.A
- (5) Medical Marihuana Residential Cultivation – § 758
- (6) Open Space Preservation – § 428
- (7) Outdoor Storage, Accessory Use – § 613.A (4)
- (8) Recreational Field Complex – § 766
- (9) Swimming Pool, Private – § 776
- (10) Waterfront Stairways and Landings – § 778

C. USES PERMITTED BY SPECIAL USE PERMIT:

- (1) Adult Foster Care, Small Group Home – § 708
- (2) Essential Service Facility, Major – § 737.B
- (3) Institutional Uses and Structures – § 752
- (4) Solar Energy System, Primary – § 773.B
- (5) Wind Energy Conversion System, Personal – § 781

D. ADDITIONAL STANDARDS:

- (1) Driveways for single family residences shall comply with § 511.
- (2) Completion. Any single-family dwelling, accessory building or addition thereto must be completed on the exterior surface with a suitable finishing material including painting or staining in the case of wood, within two (2) years from date of issuance of a land use permit or one (1) year from the date of occupancy whichever occurs last.

E. DIMENSIONAL STANDARDS:

Minimum Lot Area (A):

- 1- Family w/ Public Sewer 12,000 sq. ft.
- 1- Family w/o Public Sewer 15,000 sq. ft.
- 2-Family w/ Public Sewer 12,000 sq. ft.
- 2-Family w/o Public Sewer 15,000 sq. ft.

Minimum Lot Width:

- 1- Family w/ Public Sewer 65 feet
- 1- Family w/o Public Sewer 100 feet
- 2-Family w/ Public Sewer 70 feet
- 2-Family w/o Public Sewer 100 feet

Maximum Building Height:

- In Stories: 2 ½ stories
- In Feet: 35 feet

Minimum Yard Setbacks (B) (Front/Side/Rear):


- 1- Family w/ Public Sewer 25'/10'/25'
- 1- Family w/o Public Sewer 30'/10'/30'
- 2-Family w/ Public Sewer 25'/10'/25'
- 2-Family w/o Public Sewer 30'/10'/30'

Maximum Lot Coverage: 30 percent

Minimum Bldg. Cross Section: 24 feet

Notes to Dimensional Standards:

- (A) Lots in subdivisions having stubbed sewers shall be considered as having public sewer.
- (B) Setbacks shall be measured from the furthest protruding point of structure.

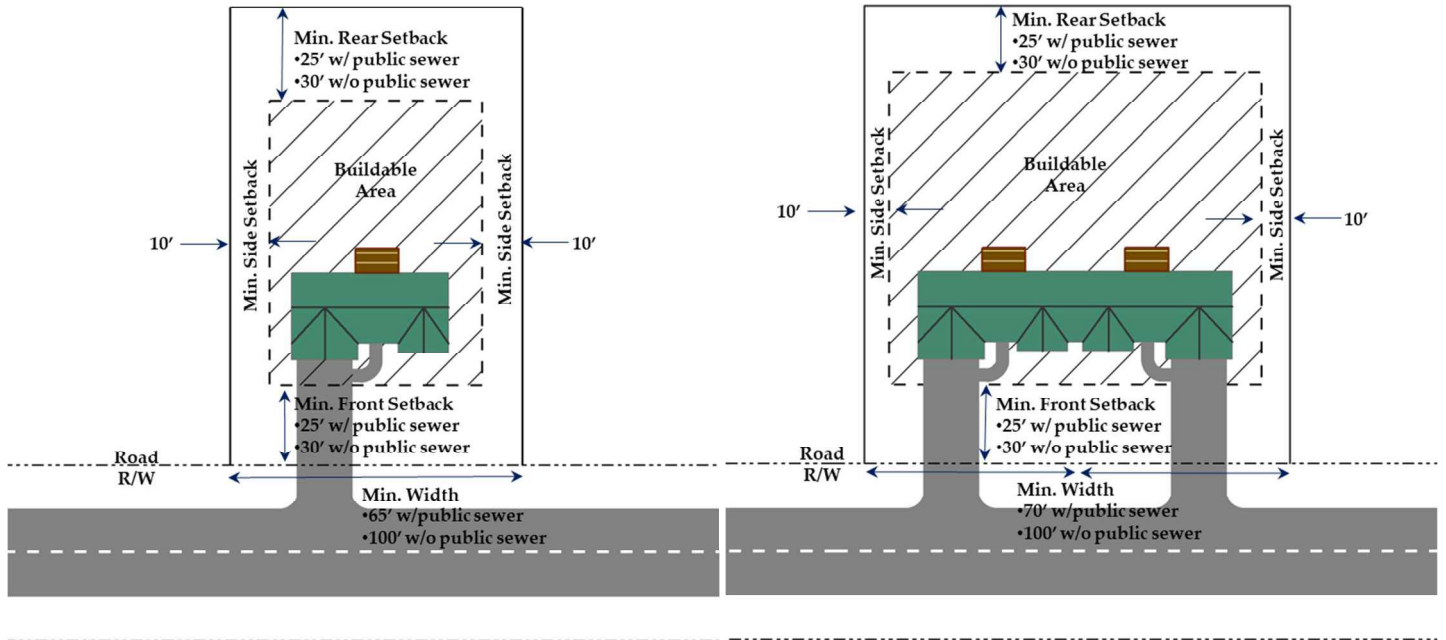

Not to scale. To be used for illustrative purposes only